




Transducer Specification

Part Number:	BII-7702		BII-7702BB	
Signal Type:	Spike (Negative or Positive), pulsed SINE/Square/Chirp, FSK, PSK, Frequency Hopping DSSS, CDMA/DSSS, etc.			
Resonant Frequency fs:	35 kHz ± 5%			
Quality Factor:	6		6	
Transmitting Voltage Response:	Refer to TVR Graph			
Free-field Voltage Sensitivity:	-191.0 dB V/μPa @ fs		-195.7 dB V/μPa @ fs	
-3dB Beam Width:	Horizontal x Vertical = Omnidirectional x 60° at fs.			
Beam Pattern:	Refer to Beam Pattern Graph			
Side Lobe Level:	No side lobes			
Free Capacitance:	25.0 nF ± 10% @ 1kHz, 1m cable.		N/A	
Dissipation:	0.004 @ 1kHz, 1m cable.		N/A	
Admittance or Impedance:	Gmax = 9.0 mS, B = 5.0 mS @ fs		Z = 70 Ω, θ = ± 20° @ fs. Power Factor PF = COSθ.	
MIPP:	550 Watts, Maximum Input Pulse Power.			
MPW @ MIPP:	40 Seconds, Maximum Pulse Width.			
MCIP:	180 Watts, Maximum Continuous Input Power.			
Cable:	1. Two Conductor Shielded Cable (SC) 2. 50 Ω RG58 Coax (RG58)			
Cable Length:	1. Default: 1m 2. Custom Note: Operating depth is limited by the cable length without a suitable underwater sealing part.			
Connector:	1. Default: Wire Leads (WL) 2. 50 Ω BNC Male (BNC) 3. Underwater Mateable Connector (UMC) 4. MIL-5015 Style (5015) 5. Custom (custom) Note: Underwater Mateable Connector is for uses underwater. Other connectors and wire leads are for dry uses, and are not water proofed.			
Mounting Options:	1. Default: Free Hanging (FH) 2. Thru-hole Mounting with Single O-ring (THSO) 3. Thru-hole Mounting with Double O-ring (THDO) 4. Bolt Fastening Mounting (Stainless Steel): (BFMSS) 5. End-face Mounting: (EFM) 6. Flange Mounting: (FGM)			
Maximum Operating Depth:	300m, Limited by cable length with wire leads.			
Physical Size:	Refer to Mechanical Drawing.			
Weight in Air:	300 grams, 1m cable.		580 grams, 1m cable.	
Operation Temperature:	1. Default: -10°C to +60°C or 14°F to 140°F. 2. Bespoke High Temperature Transducer: -10°C to 120°C, or 14°F to 248°F. Append HT to part number.			
Storage Temperature:	-20°C to +60°C or -4°F to 140°F.			
Wiring:	Two Conductor Shielded Cable	Coax/BNC	Underwater Connector	MIL-5015 Connector
Transmitting +	White or Red	Center Contact	Contact 2	Contact C
Transmitting -	Black	Shield	Contact 1	Contact B
Shielding and System Grounding	Shield	Shield	Contact 3	Contact A
How to determine pulse width, duty cycle and off-time with input pulse power (peak power): 1. Determine the input pulse power (IPP, peak power) with sound intensity required by the project. IPP MUST be less than MIPP; 2. Pulse Width ≤ (MIPP * MPW*(120°c-T)/103°c)/IPP; T: Water Temperature in °c. 3. Duty Cycle D ≤ MCIP*(120°c-T)/103°c)/IPP; 4. Off-time ≥ PW*(1-D)/D.				
WARNING: DANGER — HIGH VOLTAGE on wires. Wires shall be insulated for safety. DO NOT TOUCH THE WIRES BEFORE THE DRIVING SIGNAL IS SHUT DOWN. Cable shield must be grounded firmly for safety.				
for 50Ω BNC Male connector, it is buyer's sole responsibility to make sure that the (female) BNC shield of the signal source is firmly grounded for operating safety before hooking up transducer/hydrophone to the signal source. Coax with BNC is not intended for hand-held use at voltages above 30Vac/60Vdc.				

Physical Size (unit: mm):

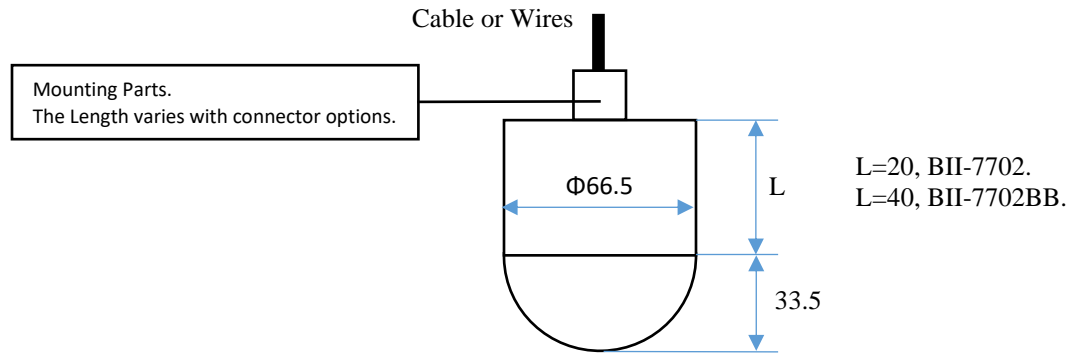

TVR (Transmitting Voltage Response):

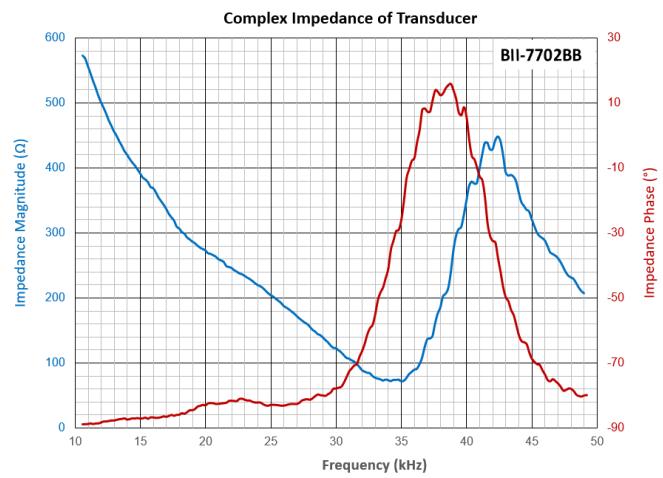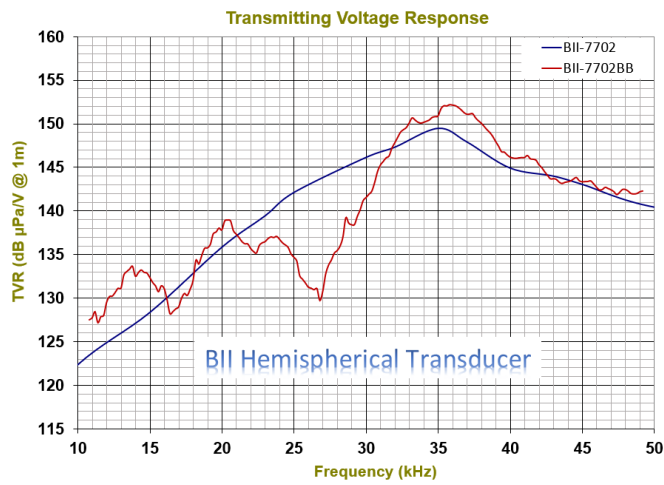

Beam Pattern:

