



**Transducer Specification**

<b>Part Number:</b>	BII-7706			
<b>Signal Type:</b>	Spike (Negative or Positive), pulsed SINE/Square/Chirp, FSK, PSK, Frequency Hopping DSSS, CDMA/DSSS, etc.			
<b>Resonant Frequency fs:</b>	100 kHz $\pm$ 5%			
<b>Quality Factor:</b>	4.5			
<b>TVR:</b>	Refer to <b>TVR Graph</b> , Transmitting Voltage Response.			
<b>FFVS:</b>	-204.0 dB V/ $\mu$ Pa @ fs, Free-field Voltage Sensitivity.			
<b>-3dB Beam Width:</b>	Horizontal x Vertical = Omnidirectional x 60°			
<b>Beam Pattern:</b>	Hemispherical			
<b>Side Lobe Level:</b>	No side lobes			
<b>Free Capacitance:</b>	6.5 nF $\pm$ 10% @ 1kHz, 1m cable.			
<b>Dissipation:</b>	0.005 @ 1kHz, 1m cable.			
<b>Admittance or Impedance:</b>	Refer to <b>Admittance Graph</b> .			
<b>MIPP:</b>	170 Watts, Maximum Input Pulse Power.			
<b>MPW @ MIPP:</b>	10 Seconds, Maximum Pulse Width.			
<b>MCIP:</b>	30 Watts, Maximum Continuous Input Power.			
<b>Operating Depth:</b>	Maximum 300m, and Limited by the cable length if the cable has wire leads or a non-waterproof connector.			
<b>Cable:</b>	1. Two Conductor Shielded Cable (SC) 2. 50 $\Omega$ RG58 Coax (RG58)			
<b>Cable Length:</b>	1. Default: 1m 2. Custom			
<b>Connector:</b>	1. Default: Wire Leads (WL) 2. 50 $\Omega$ BNC Male (BNC) 3. Underwater Mateable Connector (UMC) 4. MIL-5015 Style (5015) 5. Custom (custom) Note: Underwater Mateable Connector is for underwater uses. Other connectors and wire leads are for dry uses and are non-waterproof.			
<b>Mounting Options:</b>	1. Default: Free Hanging (FH) 2. Thru-hole Mounting with Single O-ring (THSO) 3. Thru-hole Mounting with Double O-ring (THDO) 4. Bolt Fastening Mounting (Stainless Steel): (BFMSS) 5. End-face Mounting: (EFM) 6. Flange Mounting: (FGM) Please refer to online document <a href="#">AcousticSystem.pdf</a> for a complete list of Mounting Options and more details.			
<b>Physical Size:</b>	Refer to Mechanical Drawing.			
<b>Weight in Air:</b>	180 grams, 1m cable.			
<b>Operation Temperature:</b>	1. Default: -10°C to +60°C or 14°F to 140°F. 2. Bespoke High Temperature Transducer: -10°C to 120°C, or 14°F to 248°F. Append <b>HT</b> to part number.			
<b>Storage Temperature:</b>	-20°C to +60°C or -4°F to 140°F.			
<b>Wiring:</b>	<b>Two Conductor Shielded Cable</b>	<b>Coax/BNC</b>	<b>Underwater Connector</b>	<b>MIL-5015 Connector</b>
Transmitting Signal	White or Red	Center Contact	Contact 2	Contact C
Transmitting Common	Black	Shield	Contact 1	Contact B
Shielding and System Grounding	Shield	Shield	Contact 3	Contact A
<b>How to determine pulse width, duty cycle and off-time with input pulse power (peak power):</b> 1. Determine the input pulse power (IPP, peak power) with sound intensity required by the project. IPP MUST be less than MIPP. 2. Pulse Width $\leq$ (MIPP * MPW*(120°C-T)/103°C)/IPP. T: Water Temperature in °C. 3. Duty Cycle D $\leq$ MCIP*(120°C-T)/103°C)/IPP. 4. Off-time $\geq$ PW*(1-D)/D.				
<b>WARNING: DANGER — HIGH VOLTAGE on wires. Wires shall be insulated for safety. DO NOT TOUCH THE WIRES BEFORE THE DRIVING SIGNAL IS SHUT DOWN.</b> <b>Cable shield must be grounded firmly for safety.</b>				
for 50 $\Omega$ BNC Male connector, it is buyer's sole responsibility to make sure that the (female) BNC shield of the signal source is firmly grounded for operating safety before hooking up transducer/hydrophone to the signal source. Coax with BNC is not intended for hand-held use at voltages above 30Vac/60Vdc.				


Physical Size (unit: mm):

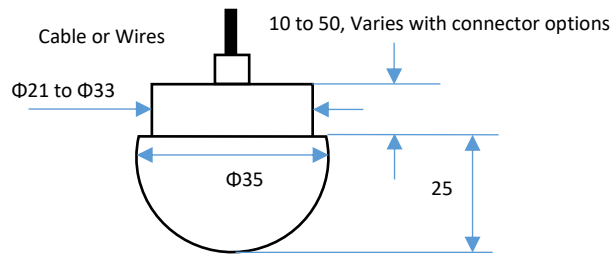

### Transmitting Voltage Response (TVR)

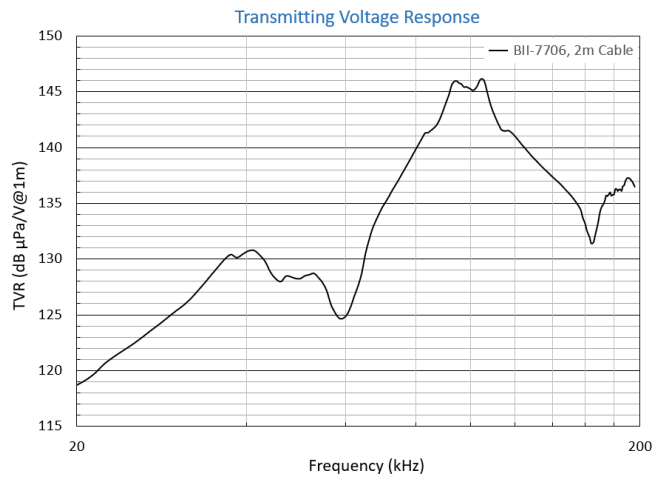

### Admittance

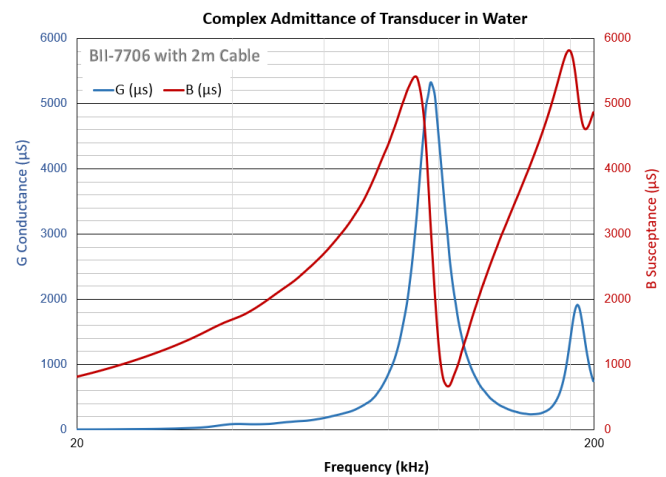

### Directivity Response

